

Technical Specification Sheet

product range: APR40
 model: Box Bar Single Glazed

ref no 007/04

The APR40 range offers a selection of slimline box type glazing bars that give the appearance of architrave timber and are suitable for single and double glazed applications. The box bar gives clean elegant sight lines internally and can be used as transoms at glass joint positions.

Specification

Glazing bars, cappings, glass stops and fixing cleats are extruded aluminium alloy 6063-T6 to BS 1474. Fasteners are either stainless steel to BS EN ISO 3506 Grade A2 or mild steel bright zinc plated. Gaskets are extruded from Thermo Plastic Rubber quality to BS 7412.

Performance


This system is designed to conform with the requirements of BS 5516, 1991 when designed and installed to Architectural Products recommendations.

Appearance

Materials are available in mill finish, polyester powder coated to BS 6496 to a range of syntha pulvin or RAL colours or anodized to BS3987.

Infill

All specifications of single glazed safety glass can be used with this type of patent glazed bar.

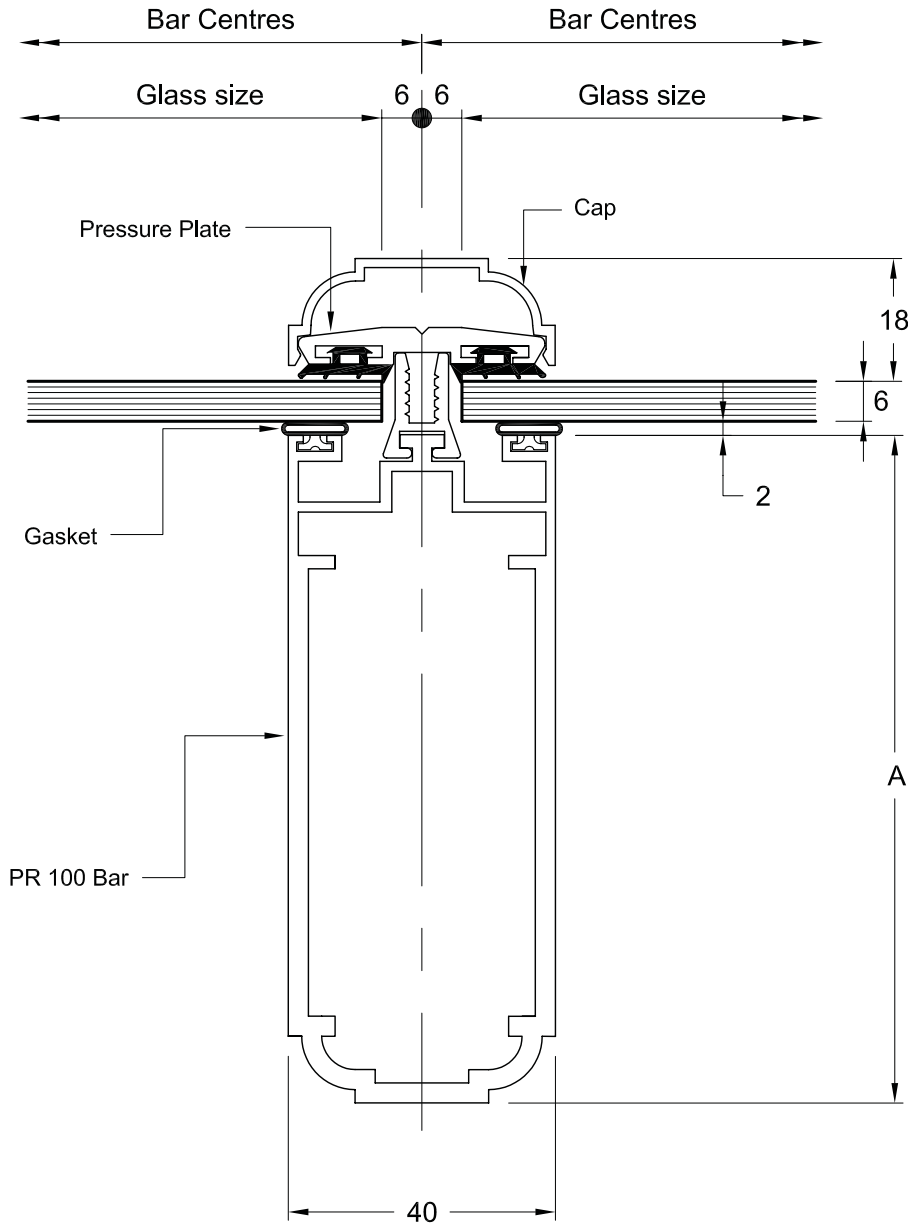

BAR	DIM	A	Span*
PR 75		75.0	2900
PR 100		100.0	3500
PR 125		125.0	3900

All Dimensions In Millimetres

* Between Fixing Points
 @ 600 Bar Centres

architectural products limited

specialised aluminium fabrications for the construction industry